



ProPressG™ Fittings with Smart Connect® Feature...




...look for the yellow spots.

Yellow spots identify the patented Smart Connect Feature, which quickly identifies unpressed fittings, allowing air to pass by the sealing element during pressure testing. The Smart Connect Feature is removed and sealed after pressing. Only ProPress fittings offer the Smart Connect Feature.

The ProPressG System consists of a series of engineered copper and bronze press fittings offered in hundreds of configurations and sizes ranging from 1/2" to 2".

ProPressG fittings use a YELLOW, high performance HNBR seal.


Selection of appropriate seals and fittings is the responsibility of the system designer and/or installer. Please contact Viega for technical guidance.

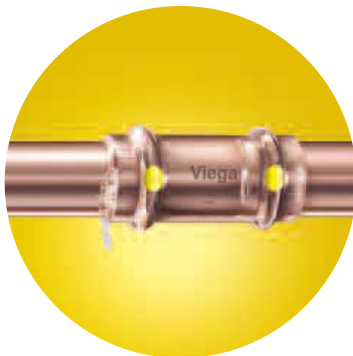

1 Identify an unpressed connection during pressure testing when air flows past the sealing element.



2 Upon identification, the ProPress tool is used to press the fitting, making a permanent leak-proof connection.

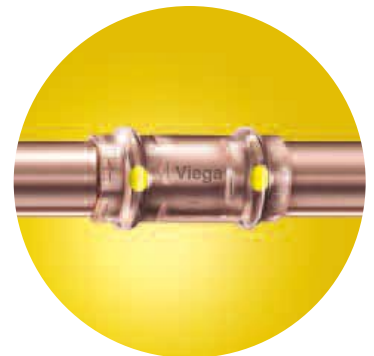

3 ProPress connections are fast, flameless and reliable.